


# HL-10K-6


## Frequency Response

### 周波数特性

Primary Series : Secondary Series

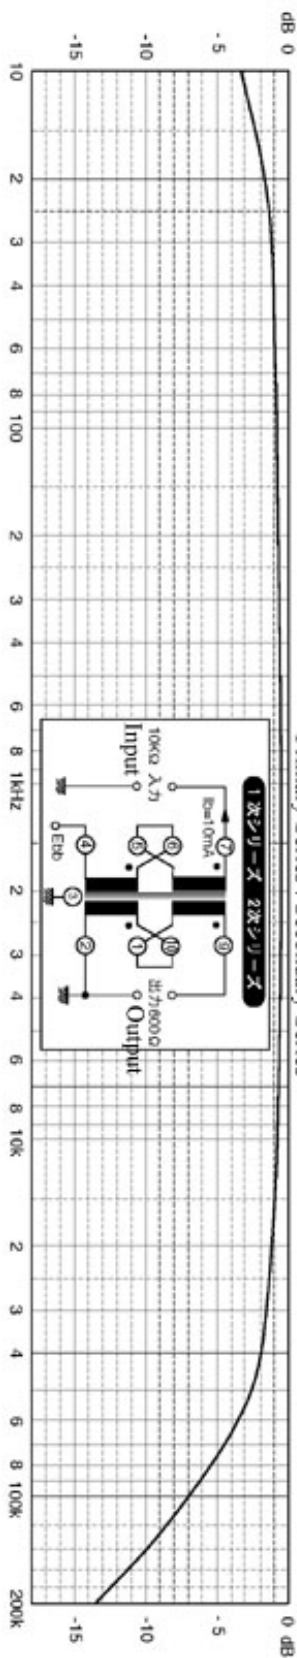

Primary Parallel : Secondary Series

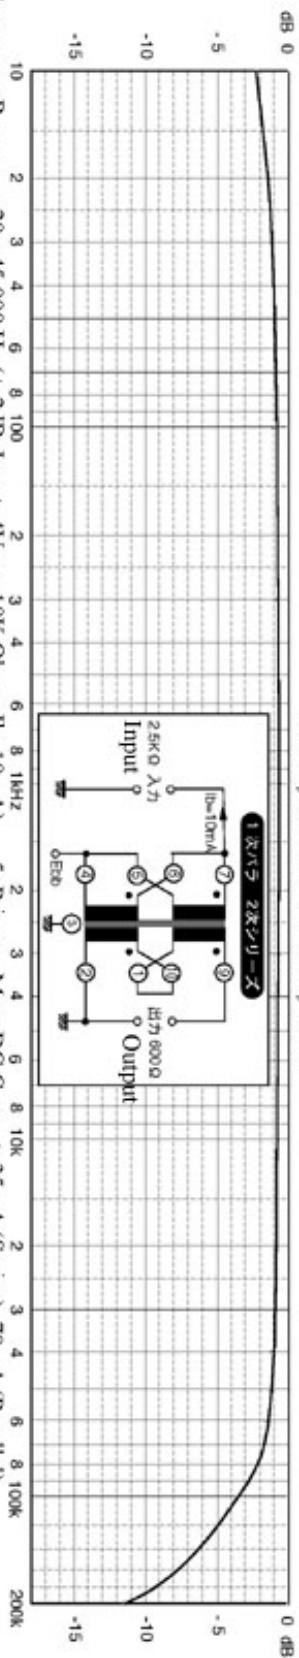


1. Frequency Response: 20 - 45,000 Hz (+/-2dB, Input: 4V,  $r_p=10K$  Ohms,  $I_b=10mA$ )

2. Primary Impedance: 10K Ohms (Primary in Series)

3. Winding Ratios: 1 : 0.264 (Entire Primary : Entire Secondary)

4. Primary Inductance: 95H(Rated), Primary in Series:  $I_b=10mA$  at 5V (50Hz)

1. 周波数特性 20Hz~45KHz:±2db,入力4V, $r_p=10K\Omega,I_b=10mA$
2. 1次インピーダンス 10K $\Omega$ (1次シリーズ)
3. 変圧比 1 : 0.264 (全1次 : 全2次)
4. 1次インダクタンス 95H(標準値), 1次シリーズ,  $I_b=10mA$ , 5V, 50Hz
5. 1次許容DC電流 35mA(シリーズ), 70mA(パラレル)
6. 巻線抵抗 全1次840 $\Omega$ 、全2次52 $\Omega$



橋本電気株式会社

〒124-0012 東京都葛飾区立石2-17-11  
Tel:03-3691-4173 (代) Fax:03-3691-0416