

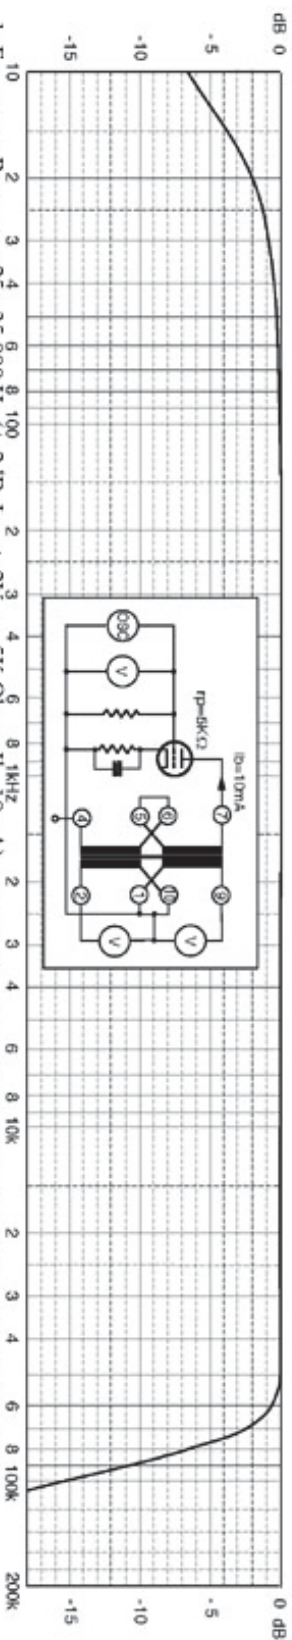


Frequency Response
周波数特性

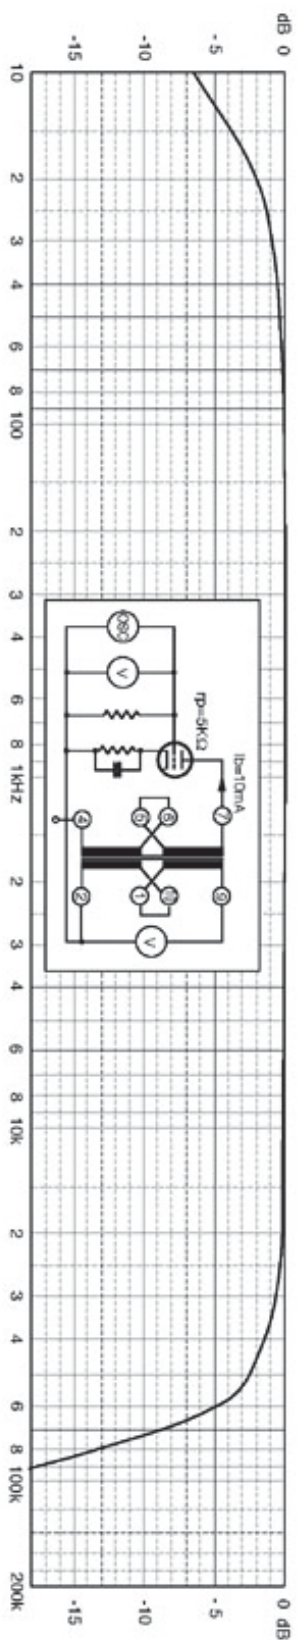

1. Frequency Response: 25 - 35,000 Hz (+/-2dB, Input: 2V, $r_p=5K\ \Omega$, $I_b=10mA$)
2. Primary Impedance: 5K Ohms (Primary in Series)
3. Winding Ratios: 1 x 2 : 1 x 2
4. Primary Inductance: 60H(Rated), Primary in Series: $I_b=7mA$ at 5V (50Hz)
5. Primary Max. DC Current: 15mA (Series), 30mA (Parallel)
6. DC Resistance: Entire Primary = 350 Ohms, Entire Secondary = 450 Ohms

1. 周波数特性
25Hz~35kHz(±2dB,入力2V, $r_p=5K\ \Omega$, $I_b=10mA$)
2. 1次インピーダンス
5K Ω (1次シリーズ)
3. 変圧比
1 x 2 : 1 x 2
4. 1次インダクタンス
60H(標準値), 1次シリーズ, $I_b=7mA$, 5V, 50Hz
5. 1次許容DC電流
15mA(シリーズ)、30mA(パラレル)
6. 巻線抵抗
全1次350 Ω 、全2次450 Ω



巻線図



橋本電気株式会社

〒124-0012 東京都葛飾区立花2-17-11
Tel:03-5691-4173 (代) Fax:03-5691-6416