


HL-20K-6


Frequency Response

周波数特性

Primary Series : Secondary Series

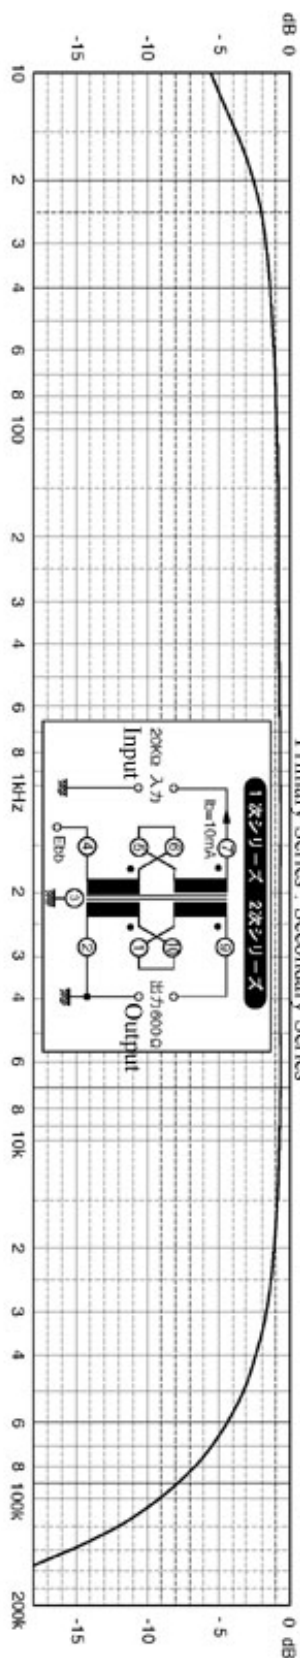


Primary Parallel : Secondary Series

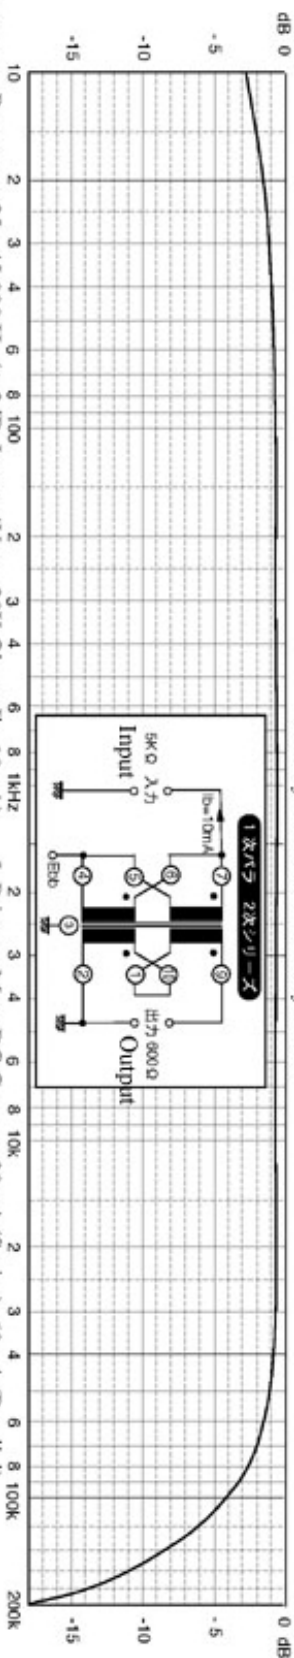

1. Frequency Response: 25 - 45,000 Hz (+/-2dB, Input: 4V, $r_p=20K\ \Omega$, $I_b=10mA$)
2. Primary Impedance: 20K Ohms (Primary in Series)
3. Winding Ratios: 1 : 0.18 (Entire Primary : Entire Secondary)
4. Primary Inductance: 100H(Rated), Primary in Series: $I_b=10mA$ at 5V (50Hz)
5. Primary Max. DC Current: 30mA (Series), 60mA (Parallel)
6. DC Resistance: Entire Primary = 1.3K Ohms, Entire Secondary = 43 Ohms

1. 周波数特性
25Hz~45KHz(±2db,入力4V, $r_p=20K\ \Omega$, $I_b=10mA$)
2. 1次インピーダンス
20K Ω (1次シリーズ)
3. 変圧比
1 : 0.18 (全1次 : 全2次)
4. 1次インダクタンス
100H(標準値), 1次シリーズ, $I_b=10mA$, 5V, 50Hz
5. 1次許容DC電流
30mA(シリーズ), 60mA(パラレル)
6. 巻線抵抗
全1次1.3K Ω , 全2次43 Ω



橋本電気株式会社
〒124-0012 東京都葛飾区立石2-47-11
Tel:03-3901-4173 (代) Fax:03-3901-9416